


Base Assembly

- 1 Open up the folded Water Base.
- 2 Position lower locking panel at the base bottom and fix it by inserting the pole sleeve.
- 3 Fill the two base tanks with water approx. 18.5 gallons (70 liters). To drain, use each valve located on both sections of the base by removing the cap.
- 4 Fix upper locking panel to the base by screwing the sleeve nut onto the pole sleeve.
- 5 Mount the collapsible, 4-pronged Support Bracket to the base.
- 6 Secure Support Bracket at the base corners with the supplied plastic C-clips.
- 7 Mount telescopic pole with pre-mounted flag clips (A).

Other Base Options




- I Cross Base
- II Square Base 55x55
- III Car Base
- IV Ground Sleeve
- V Auger Sleeve

For bases featuring a threaded screw, rotate the pole until it is securely fixed to the base.

T-Pole® 100 Triple Arm

- 8 Screw three of the banner arms (B) into the upper connecting piece (C).
- 9 Screw the remaining three banner arms (B) into the lower connecting piece (D).
- 10 Attach flag to the clips of the telescopic pole and banner arm (make sure to mount the double grommet at the top left/right corner of flags).
- 11 Extend telescopic pole to the point until the spring buttons (E) lock.

Other T-Pole® 100 Options

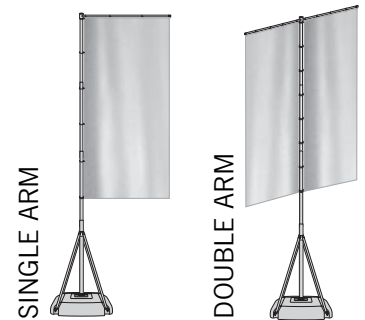

Do not fly your T-Pole® 100 Triple Arm in extreme winds (7-12mph or 3bft and higher) and/or thunderstorms. Do not use near overhead wires. User must read and observe construction sheet. If this is not done correctly it may result in injury or death and all warranties will be void. All warranties will be void if the T-Pole® 100 Triple Arm hardware is used with any flag not produced by us.

